



dimensions

CW 8	
Height (A)	1092 mm
Width (B)	683 mm
Depth (C)	711 mm
Door (D)	597 mm
Height under door (E)	363 mm

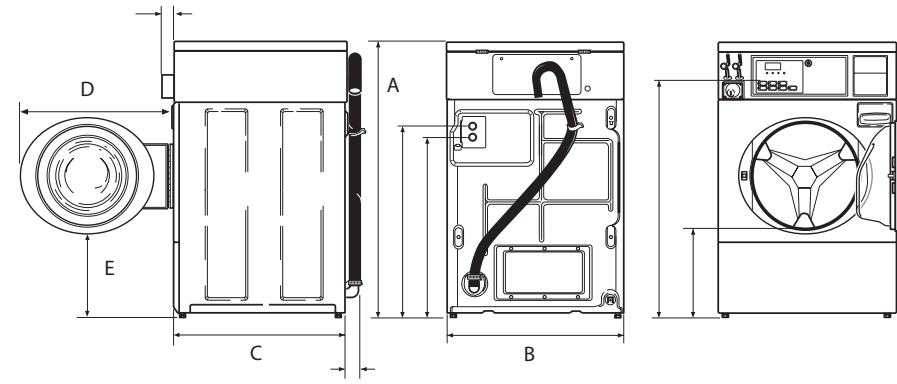


dimensions

CD 8	
Height (A)	1077 mm
Width (B)	683 mm
Depth (C)	711 mm
Door (D)	597 mm

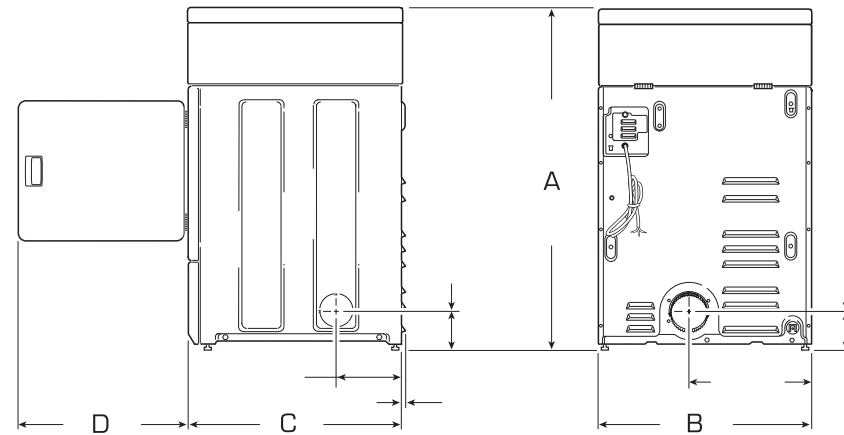

dimensions

CS 8	
Height (A)	1905 mm
Width (B)	683 mm
Depth (C)	711 mm
Door (D)	448 mm
Door (E)	597 mm
Height under door (F)	363 mm

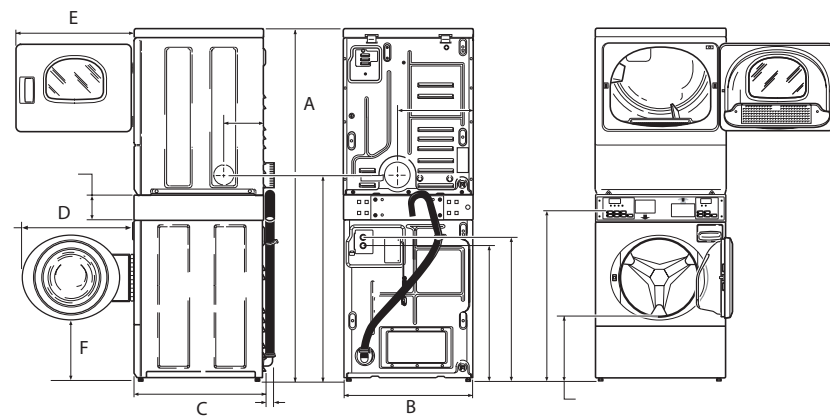

TECHNICAL SPECIFICATIONS

Washer CW 8

Capacity (kg)	8	
Drum volume (L)	80	
Spin speed (rpm)	500 / 650 / 1000	
G-force	300	
Heating	Electric (kW) 4,8	
Dimensions	Height (mm)	1092
	Width (mm)	683
	Depth (mm)	711
Weight	Gross (kg)	125
	Nett (kg)	120
Packing dimensions	Height (mm)	1130
	Width (mm)	730
	Depth (mm)	820
	Volume (m ³)	0,68

Dryer CD 8

Capacity (kg)	8	
Drum volume (L)	201	
Power motor (kW)	0,25	
Air outlet diameter (mm)	102	
Heating	Electric (kW) 5,35	
Dimensions	Height (mm)	1077
	Width (mm)	683
	Depth (mm)	711
Weight	Gross (kg)	73
	Nett (kg)	68
Packing dimensions	Height (mm)	1130
	Width (mm)	730
	Depth (mm)	820
	Volume (m ³)	0,68

Stacked CS 8

Dimensions	Height (mm)	1905
	Width (mm)	683
	Depth (mm)	711
Weight	Gross (kg)	174
	Nett (kg)	168
Packing dimensions	Height (mm)	1990
	Width (mm)	730
	Depth (mm)	820
	Volume (m ³)	1,19

Type of heating POWER SUPPLY - FUSES

	230 V	230 V	400 V
	1 AC	3 AC	3 AC
	50 Hz	50 Hz	50 Hz
CW 8	25 A	15 A	15 A
CD 8	25 A	16 A	16 A

All specifications subject to change without notice.



Alliance International bvba, Nieuwstraat 146, B-8560 Wevelgem (Belgium)
Tel +32 56/41 20 54 - Fax +32 56/41 86 74 - info@ipso.be - WWW.IPSO.BE

CS81062009 PRINTED ON 60% FIBRE RECYCLED PAPER.

PROFESSIONAL LAUNDRY EQUIPMENT



CW 8
CD 8
CS 8





CW 8 - CD 8 - CS 8

Commercial Washer CW 8

- Stainless steel outer & inner drum
- 4 large heavy duty shock absorbers
- Totally freestanding: can be installed on any floor and any level
- CE-approved product
- Door opens 180° for easy loading and unloading
- Available in coin
- Standard with drain pump, drain valve optionally available



CW 8 control

- Electronic display
- 5 standard wash programmes
- Time remaining countdown
- Cycle status lights
- Door lock light
- High speed of 1000 rpm (final spin)
- Induction motor with standard inverter drive



Commercial Dryer CD 8

- Galvanized steel cylinder
- Oversized lint filter: easily removable for cleaning
- Noiseless exhaust blower assures short drying times and low operating costs
- Touch pad control: 4 temperature settings / end of cycle signal
- Wide door opening of 180° for easy loading and unloading
- Available in coin



Frontal soapbox

- Standard with built-in air gap
- 2 inlet valves (hot and cold water)

Stainless steel top, front & side panels

- Optionally available (both coin and OPL)



Stainless steel top, front & side panels

- Optionally available (both coin and OPL)



Commercial Stacked CS 8

- Freestanding soft mount: can be installed on any floor and any level
- Washer and dryer are having a window
- Reduced floor space for washer & dryer
- Touch pad control: 4 temperature settings / end of cycle signal
- Available in coin

Stainless steel top, front & side panels

- Optionally available (both coin and OPL)

