
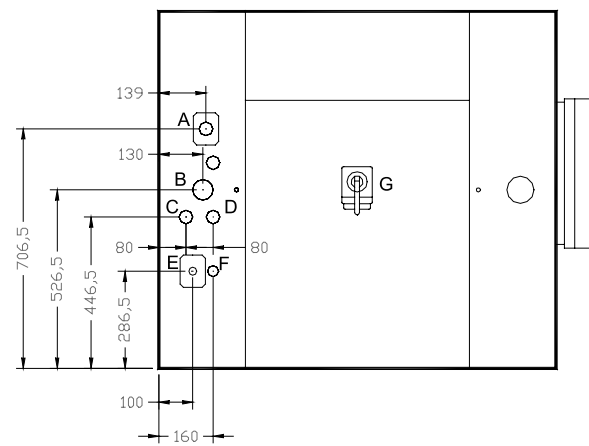
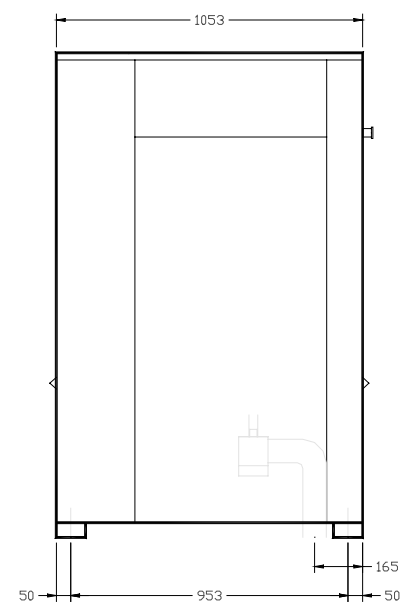


front view HM 270

side view HM 270




top view HM 270

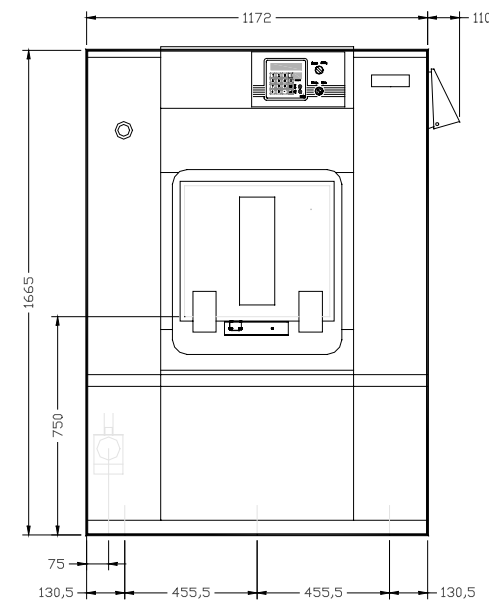

front view HM 330

side view HM 330

top view HM 330

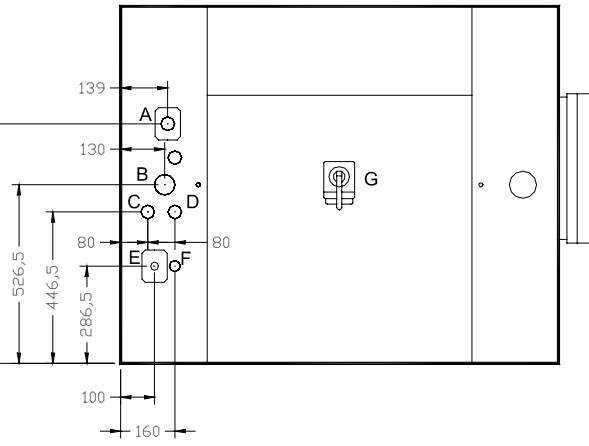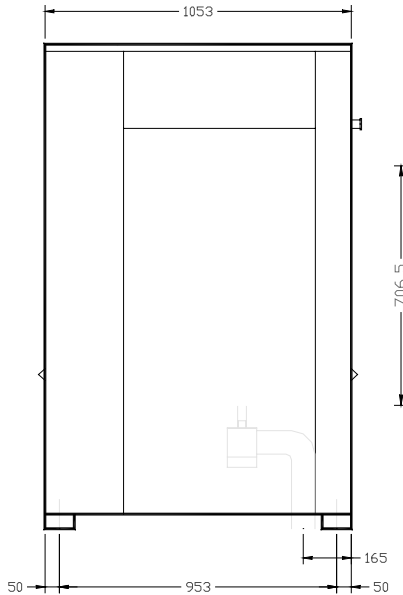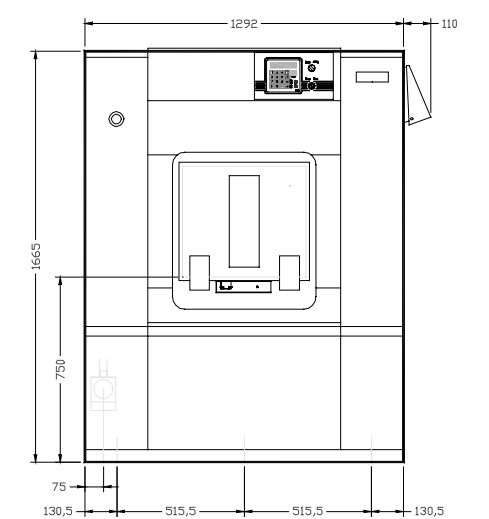

- A. Electrical connection
- B. Ventilation tub
- C. Cold water connection 3/4"
- D. Warm water connection 3/4"
- E. Electrical connection steam
- F. Steam connection 3/4"
- G. Main switch

# TECHNICAL SPECIFICATIONS HM 270-330-490-670

	HM 270	HM 330	HM 490	HM 670				
Cylinder:	Capacity 1/9 (kg)	30	36,6	54,4				
	Capacity 1/10 (kg)	27	33	49				
Volume (L)	268	329	489	667				
Diameter (mm)	800	800	800	800				
Depth (mm)	534	654	974	1347				
Door opening diam (mm)	450 x 310	450 x 310	450 x 310	450 x 310				
Loading height (mm)	750	750	750	750				
Speed:	Spin (rpm)	900	900	900				
	Wash (rpm)	45	45	45	45			
G-factor	362	362	362	362				
Motor power (kW)	4.0	4.0	5.5	5.5				
Heating	Steam (kg/h)	18	26	40	60			
	Electric (kW)	18	27	36	45			
	Gas (kW)	25	25	25	25			
Soapbox compartments	4	4	4	4				
Split pocket (2 compartments)	-	-	-	2				
Water connection	cold (")	3/4	3/4	3/4	1			
	hot (")	3/4	3/4	3/4	1			
	soft (option) (")	3/4	3/4	3/4	1			
Drain valve (")	3	3	3	3				
Weight	Net (kg)	880	1060	1300	1570			
	Gross (kg)	1100	1160	1520	1800			
Dimensions	Height (mm)	1665	1665	1665	1690			
	Width (mm)	1172	1292	1612	1965			
	Depth (mm)	1053	1053	1053	1053			
	Packing dimensions	Height (mm)	1970	1970	1970	1970		
	Width (mm)	1500	1620	1940	2290			
	Depth (mm)	1350	1350	1350	1350			
	Volume (m³)	3.99	4.31	5.16	6.09			
Type of heating	POWER SUPPLY - FUSES							
	230V 3AC	400V tri + N	230V 3AC	400V tri + N	230V 3AC	400V tri + N	230V 3AC	400V tri + N
Electrical	63 A	40 A	100 A	50 A	125 A	63 A	160 A	80 A
Gas	16 A	16 A	16 A	16 A	16 A	16 A	16 A	16 A
Steam	16 A	16 A	16 A	16 A	16 A	16 A	16 A	16 A

All specifications subject to change without notice



Alliance International bvba, Nieuwstraat 146, B-8560 Wevelgem (Belgium)  
Tel +32 56/41 20 54 - Fax +32 56/41 86 74 - info@ipso.be - [www.ipso.be](http://www.ipso.be)

BARRIER WASHER EXTRACTORS



HM 270  
HM 330  
HM 490  
HM 670



HM2701012009 PRINTED ON 60% FIBRE RECYCLED PAPER.



HM 270 · HM 330 · HM 490 · HM 670

**Efficient soap box**

- powder and liquid
- number of compartments: 4




**Big door opening**

- easy loading and unloading



**Easy service**

- easy access to service intensive components
- fault detection on PS40

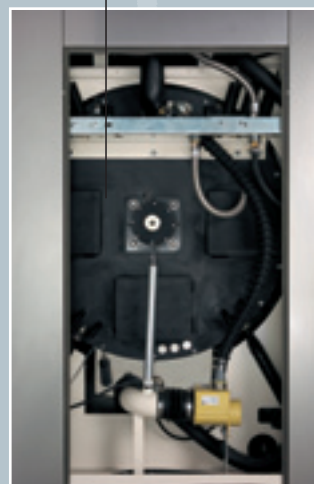

**Pass-through concept**

- opposed doors: soiled room / clean room
- no contact between disinfected laundry and contaminated linen
- available in:
  - electric heating
  - steam heating
  - gas heating



**Safety**

- electrical door lock mechanism
- according to EC-regulations



**Inverter drive**

- wash and spin speeds freely programmable
- low noise level
- high G-forces
- up to 900 rpm
- cast iron pulleys




**PS40 microprocessor**

- freely programmable
- 4 standard programmes
- possibility to compose 40 programmes
- temperature freely programmable
- water level freely programmable
- infra red port: easy downloading of programmes from a laptop
- up to 12 soap pumps centrally controlled by PS40


**Stainless steel cabinet**

full range:  
 HM 270: 27 kg  
 HM 330: 33 kg  
 HM 490: 49 kg  
 HM 670: 67 kg


front view HM 490

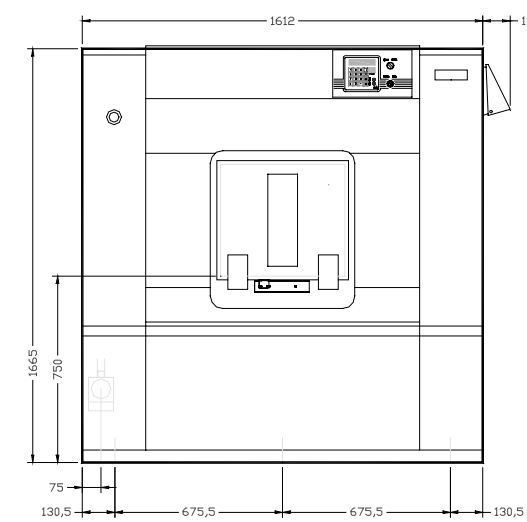


side view HM 490

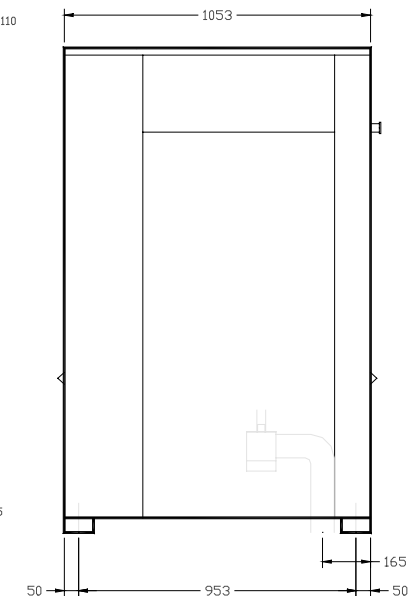


top view HM 490

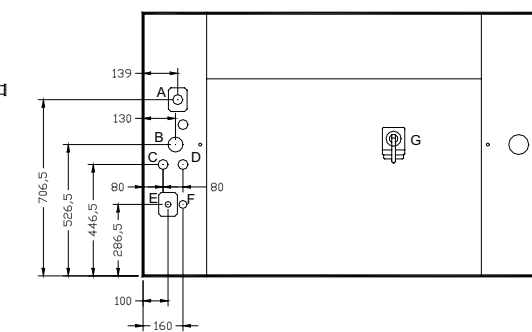


front view HM 670

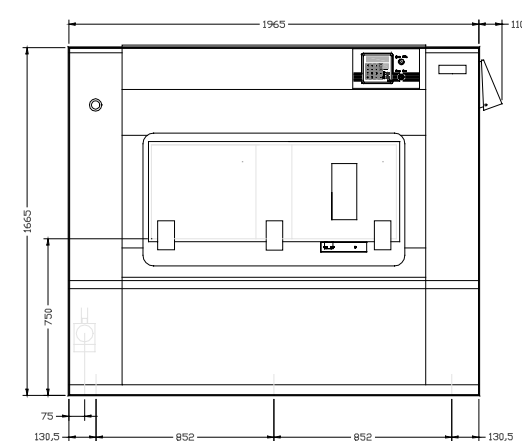

side view HM 670

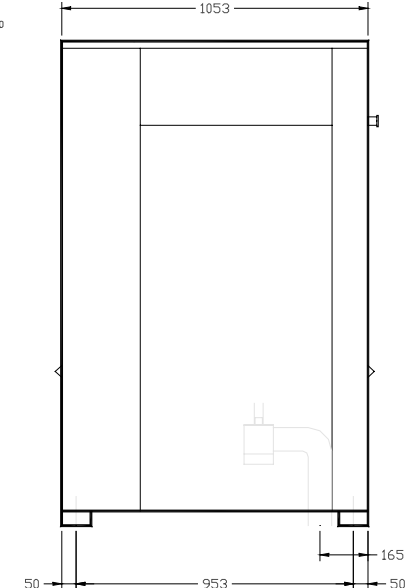

top view HM 670

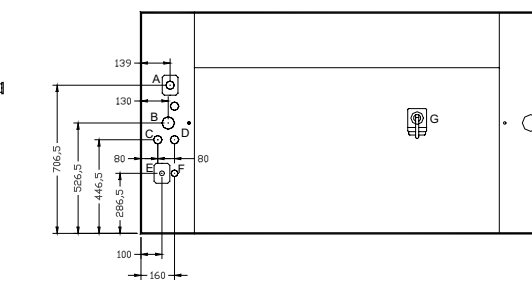

- A. Electrical connection
- B. Ventilation tub
- C. Cold water connection 3/4"
- D. Warm water connection 3/4"
- E. Electrical connection steam
- F. Steam connection 3/4"
- G. Main switch